

Infinity Continuous Flow Hot Water

Our Story

Rinnai revolutionised the Australian water market in the early 1990's when we launched the first electronically controlled gas continuous flow hot water system. Appropriately named, the Rinnai Infinity delivered a new user experience of steady and continuous, temperature controlled hot water.

Our latest Infinity products offer you unparalleled performance, user comfort, energy efficiency and water conservation features to help further reduce your household running cost.

Rinnai Continuous Flow hot water products have also been designed and engineered to withstand tough Australian conditions whilst never running out of hot water. This, coupled with great reliability, makes the Rinnai Infinity the obvious choice for your hot water needs.

Market Leading Warranty

Our commitment to producing exceptionally engineered, high quality products is supported by our market leading warranty offering and ensures your ultimate protection and peace of mind.

For Infinity models the standard product warranty is 12 years for Heat Exchangers and 3 years parts and labour. Rinnai is now offering the option of extending the warranty on the Heat Exchanger by a further 13 years taking it to a total of 25 years. This is subject to the terms and conditions outlined in the Warranty booklet.


Features and Benefits

- · Quicker commissioning and installation
- · Market leading quality, Japanese design components manufactured in Rinnai's own state of the art facility
- 1.5L/min minimum operating water flow rate
- Improved resistance to corrosion
- Modern design packaged in a slimline case construction
- 50°C compliant models available. This is adjustable to achieve a true 50°C at the point of use#
- · Compact 26L internal model available
- Enhanced electronic controlled safety monitoring
- Anti-frost protection down to -20°C
- 6 Star energy rating
- Puretemp™ temperature stability control, provides quick flow and precise outlet water temperatures.
- Enhanced Combustion Technology (ECT), ensuring maximum comfort with low flow (WELS) shower heads
- · Built in status operation monitor displays set water temperatures and any system faults
- · Natural gas or LPG models available





Quality and Reliability

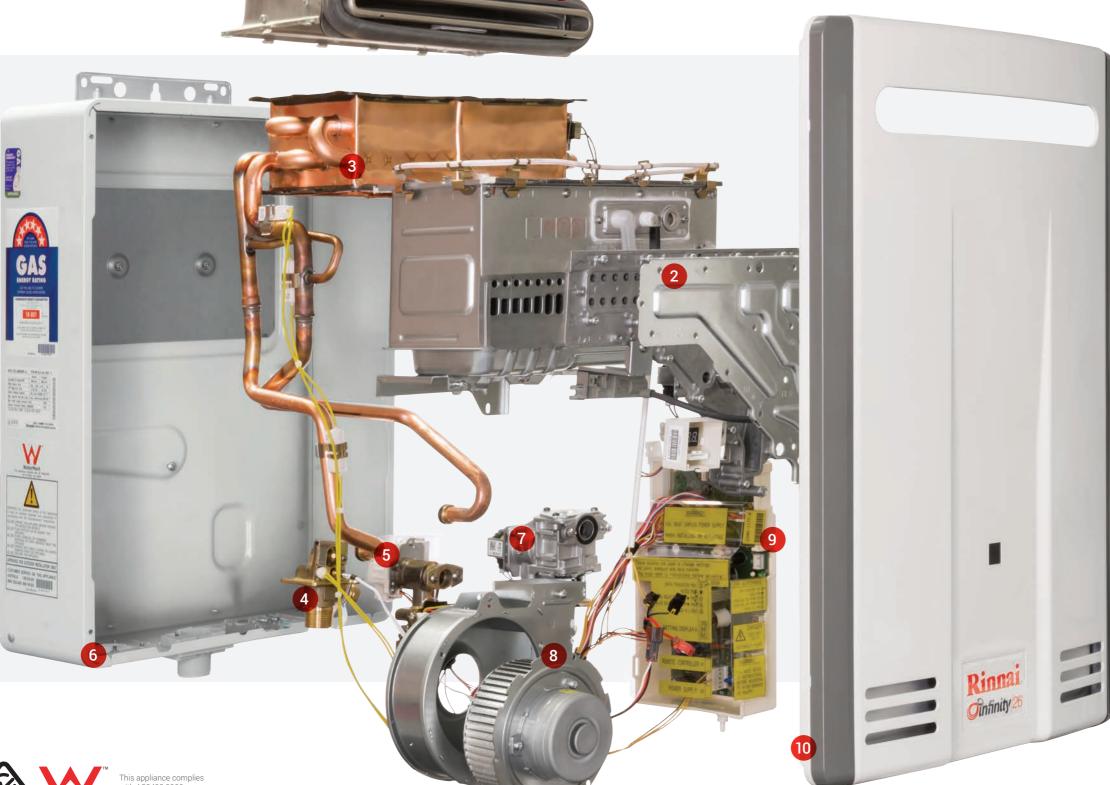



Made from quality stainless steel our flue

2. Gas Burner Assembly

our state of the art manufacturing facilities.

of the Rinnai Infinity, our Heat Exchangers

4. Hot Water Connection

5. Cold Water Connection

7. Gas Control Valve

safe-guards to ensure the right amount of unparalleled performance and energy efficiency.

8. Combustion Fan

9. PCB Controller

in-house designed and manufactured PCBs, insects and ensures hassle free operation.

10. Infinity Front Cover

to filling 40 MCG's with hot water and creating enough energy to launch 24 space shuttles into outer space each year.







SAI Global Lic W208

No comparison

Sizing guide

You can select the right capacity Rinnai Infinity for your current hot water needs or for future needs as your family and demand for hot water grows.

	Applicable Models		Infinity 12	Infinity 16	Infinity 20	Infinity 26	Infinity 26i	Infinity 32		
	No. of shower outlets*	Warm Climate	1	1	1-2	1-3	1-3	2-4		
	No. of shower outlets*	Cool Climate	1	1	1	1-2	1-2	2-3		



^{*}Sizing assumes AAA or *3 star outlets. For non WELS rated or WELS rated fixtures with higher flow outlets (AA, A, 2 star or 1 star rated) a larger size appliance or additional appliance may be required to deliver adequate performance. Consult with your hot water specialist.

Hot Water Operating Cost Comparison

When you consider the space savings compared to storage, eco-efficiency and the continuous supply of hot water that comes with Rinnai Infinities continuous flow technology, there is no comparison. When you look at the cost savings over the long run, well, it just keeps getting better. More comfort for less money.

Hat water avaters		ANNUAL ENERGY COST						
Hot water system		1 Person (60 Litres per day)#	2 People (90 Litres per day)#	3 People (120 Litres per day)#	4 People (150 Litres per day)#			
Continuous flow technology	Natural Gas	\$160	\$230	\$295	\$365			
4 Star Gas Storage Tanks	Natural Gas	\$285	\$350	\$415	\$475			
5 Star Gas Storage Tanks	Natural Gas	\$230	\$290	\$350	\$410			

^{*}The above annual energy costs are taken from sustainability Victoria. Refer to: www.sustainability.vic.gov.au/You-and-Your-Home/Save-energy/Hot-water/Hot-water-running-costs for calculation methodology and more information.

Water Controllers

Rinnai offers a comprehensive range of water controllers for our Infinity Continuous Flow range that enhances your hot water experience through precision temperature control whilst optimising energy and water use.



Universal

- Temperature display
- Priority transfer button
- Preheat system function (where installed)




Deluxe


- Temperature display and clock
- Priority transfer button
- Preheat system function (where installed)
- Bath fill and Shower set function



The wireless controller has all the features of the Universal Controller but adds an element of portability and ease of retrofitting, both unique to Rinnai. The wireless controller also has a child lock to ensure safety for younger family members.

Specifications & Accessories

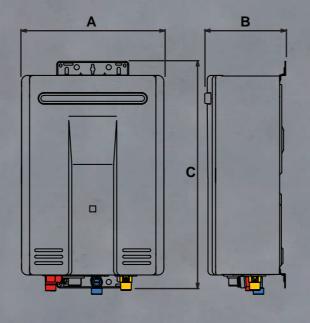



Model	INF12	INF16	INF20	INF26	INF26 Touch	INF26 Internal	INF32		
actory pre-	50 60	50 60	50 60	50 60	50 60	50 60	50 60		
Min operatii	1.5	1.5	1.5	1.5	1.5	2.4	2.4		
Min water pressure (kPa) Max 1000 (kPa)			120	120	160	200	200	140	180
	NG	Min	16	16	19	16	16	16	14
Sas rate		Max	92	124	156	199	199	195	250
mj/h)	LPG	Min	16	16	19	16	16	16	14
		Max	92	124	156	199	199	195	250
low rate	rate 25°C Rise		12	16	20	26	26	26	32
L/Min)	20°C Rise		15	20	24	26	26	32	37
Star rating			6.2	6.1	6.0	6.0	6.0	6.1	5.9
Vidth (mm) A			356	356	356	356	356	350	470
Depth (mm) (Inc brackets) B			202	202	202	202	202	274	244
Height (mm) (Inc brackets) C			571	571	571	571	571	641	644
Hot water c	15	20	20	20	20	20	20		
Cold water o	15	20	20	20	20	20	20		
as connec	20	20	20	20	20	20	20		
Veight (kg)			13.5	13.5	14.5	15.5	15.5	21	29
		1 35	637						

ABS Recess Box (SBOX)

SBOX is manufactured from a tough ABS plastic, the SBOX is light weight, easy to handle, durable and easy to install.



Metal Recess Box (RBOX06LW)

designed to house and hide the pipework but also create a smooth and clean finish to the installation

unsightly pipework and complement its

Pipe Cover

(PCD01W)

Flue Diverter

Directing the flue gases sideways means your Rinr Infinity unit may be installed into areas with restricted. entilation like balconie



Security Bracket (SECBKT)

Secure your investment with a quicl and easy to install security bracket.

Rinnai Australia Pty Ltd

ABN 74 005 138 769

100 Atlantic Drive, Keysborough, Victoria 3173

For further information visit www.rinnai.com.au or call 1300 555 545



TOTAL HOME COMFORT





